



CERTIFICATE OF QUALITY

EcoSure® Type GP Cement

NZS3122:2009 (Bulk & Bag Despatch)



Issued to: National Sales Manager

Test Report No: 24#09

info@goldenbay.co.nz

Code	Week Ending / Voyage	Specific Surface Area	Normal Consistency	Initial Set	Final Set	Soundness	Compressive Strength							Free Lime	Sodium Equivalent (NaEq)	Sulphur Trioxide (SO3)
							ISOCEN			Concrete						
							3 days	7 days	28 days	Slump	3 days	7 days	28 days			
Mean		351	29.3	143	3:36	1	33.8	46.0	64.7	92	25.4	36.9	48.1	1.6	0.53	2.36
Standard Deviation		8	0.6	14	0:13	0.4	1.0	1.5	1.0	7	1.6	2.0	3.6	0.2	0.02	0.04
Min		335	28.3	105	3:15	0	31.8	43.1	63.3	80	23.0	33.5	43.0	1.2	0.51	2.31
Max		365	30.3	165	4:00	2	35.6	48.5	66.6	100	28.0	40.5	56.5	2.0	0.56	2.47
NZS 3122:2009 Requirements				45 min	6:00 max	5 max		35.0 min	45.0 min						0.6 max	3.5 max
Units		m2/kg	%	minutes	hrs:mins	mm	MPa	MPa	MPa	mm	MPa	MPa	MPa	%	%	%
240114-705-GP	14/01/24	350	28.3	165	4:00	1	35.0			80	26.5			1.3	0.54	2.31
240111-476-GP	11/01/24	365	29.1	150	3:45	1	33.6	45.4		90	28.5	38.0		1.5	0.52	2.34
240106-162-GP	06/01/24	360	29.1	150	4:00	0	34.4	45.2						1.5	0.53	2.31
240102-160-GP	02/01/24	360	29.1	150	3:45	1	33.8	45.0		100	23.5	35.0		1.6	0.51	2.35
231225-830-GP	25/12/23	360	29.1	135	3:30	2	31.8	47.5		100	23.5	33.5		1.7	0.53	2.39
231221-461-GP	21/12/23	350	29.2	105	3:15	1	33.0	46.1	63.7	90	26.0	39.0		1.5	0.53	2.37
231214-323-GP	14/12/23	350	28.6	150	3:15	1	33.2	45.5	64.3	90	28.0	40.5		1.8	0.54	2.41
231211-321-GP	11/12/23	355	28.4	150	3:30	1	32.6	45.8	64.6					1.8	0.55	2.39
231209-760-GP	09/12/23	360	28.4	120	3:15	1	35.6	48.5	66.4					1.5	0.54	2.47
231202-741-GP	02/12/23	360	28.3	120	3:15	1	34.9	48.3	65.3	90	26.0	37.0	45.5	1.7	0.55	2.34
231201-354-GP	01/12/23	340	29.8	120	3:30	2	33.7	47.2	65.0					1.2	0.55	2.31
231128-351-GP	28/11/23	350	29.7	135	3:45	1	34.8	48.3	64.0	90	25.5	37.0	48.5	1.5	0.56	2.42
231123-044-GP	23/11/23	345	29.7	150	3:45	2	33.3	46.2	66.6					1.9	0.54	2.38
231120-041-GP	20/11/23	350	29.3	150	3:45	2	32.9	45.0	63.3	100	23.5	35.0	43.0	1.5	0.53	2.38
231114-855-GP	14/11/23	350	29.7	150	3:45	2	35.6	47.1	65.1	100	26.0	36.0	47.5	1.5	0.56	2.36
231105-560-GP	05/11/23	340	29.6	135	3:30	1	35.3	46.1	66.5	100	25.0	35.0	46.5	1.6	0.52	2.35
231102-319-GP	02/11/23	335	29.6	150	3:45	2	33.0	44.8	65.6	80	26.5	38.5	56.5	1.5	0.53	2.38
231028-990-GP	28/10/23	350	30.0	150	3:30	0	33.6	43.3	63.8	90	25.0	36.5	47.0	1.7	0.51	2.33
231024-978-GP	24/10/23	340	30.0	150	3:30	1	34.3	46.1	65.1					2.0	0.54	2.33
231019-725-GP	19/10/23	365	30.0	150	3:45	2	32.9	43.1	63.5					1.8	0.52	2.32
231016-722-GP	16/10/23	360	30.3	150	3:45	1	32.7	44.0	63.4	85	25.0	40.0	50.5	1.5	0.51	2.34
231011-414-GP	11/10/23	345	29.6	150	3:45	1	34.1	46.4	64.0	90	25.5	37.0	48.0	1.3	0.51	2.40
231006-050-GP	06/10/23	355	29.6	135	3:30	1	33.3	45.2	64.1	90	23.0	35.0	47.5	1.8	0.52	2.37
231002-045-GP	02/10/23	340	29.6	150	3:45	1	33.0	47.2	64.7					1.5	0.53	2.36
230927-762-GP	27/09/23	350	29.8	150	3:30	2	34.5	46.6	65.4					1.6	0.53	2.36

The above samples were tested as received in accordance with the current terms of accreditation and methods stated in NZS 3122:2009 with the exception of: Chemical composition to ASTM C114-18

All concrete testing conducted in accordance with NZS 3112:1986.

This Report must not be reproduced except in full

Vincent Lane
Works Chemist



Portland Works, Portland, Whangarei 0178



Date issued: 26/01/2024

Page 1 of 3



EcoSure® Type GP Cement

Compressive Strength ISO-CEN Mortar (Bulk Dispatch)

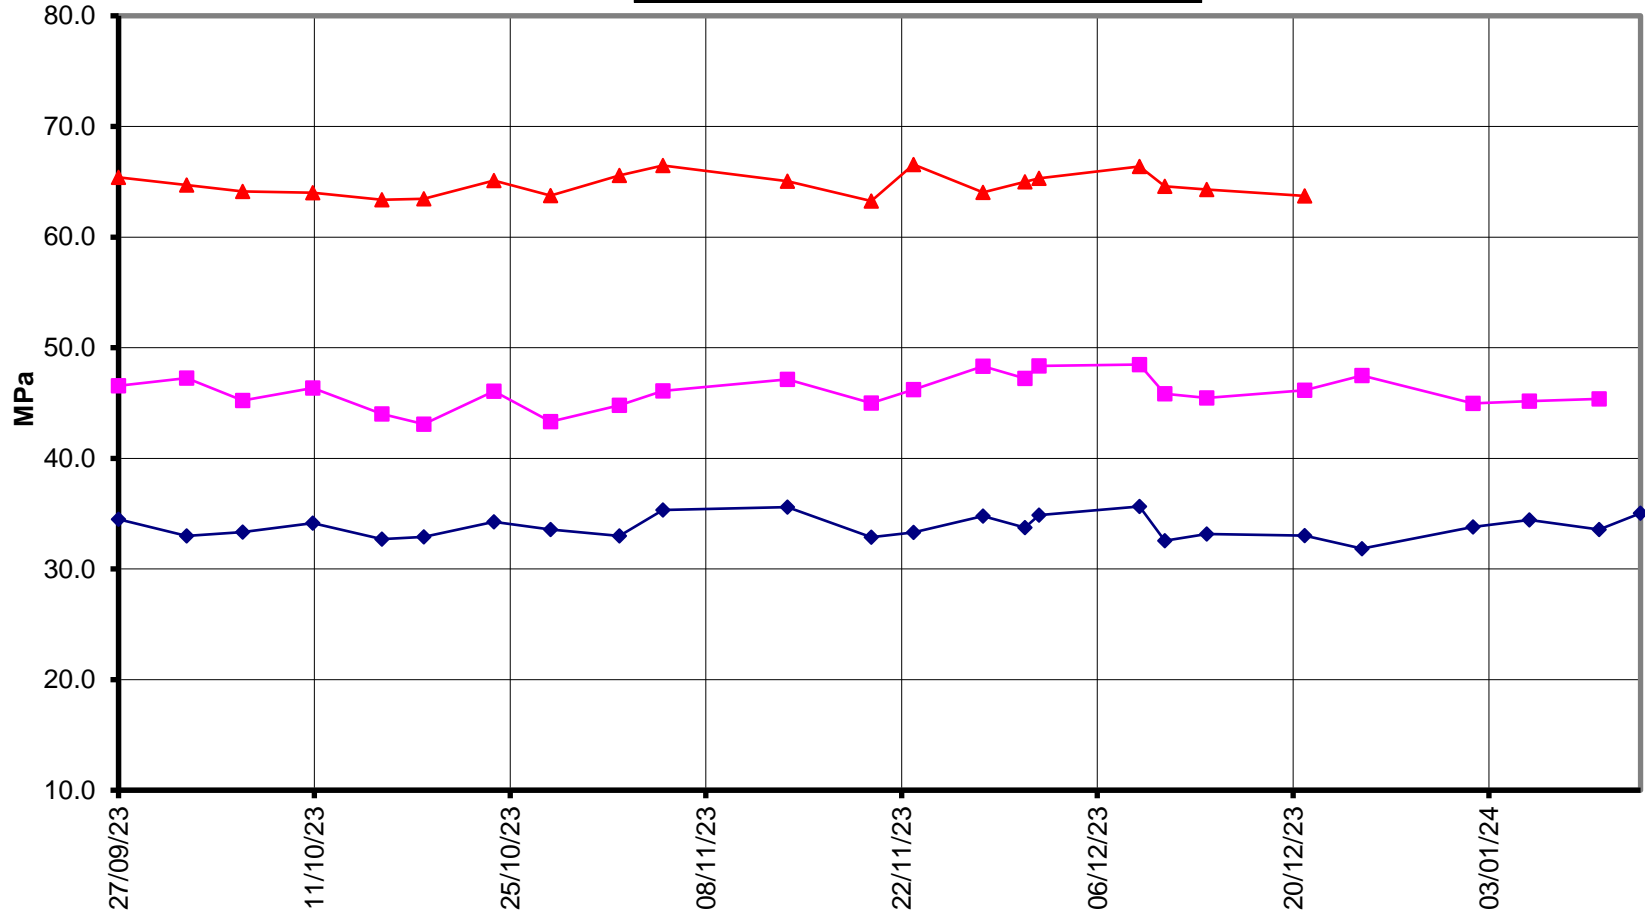



EcoSure® Type GP Cement

Compressive Strength Concrete (Bulk Dispatch)



—x— 28 Days —■— 7 Days —◆— 3 Days —x— Slump

